

# Ckeckweighing scale

## CW100

- Backlight LCD display with digits of 25mm.
- Stainless steel housing.
- Stainless steel pan.
- IP67 protection.
- Capacities available: 3, 6, 15 or 30 kg.
- External calibration.
- 4 keys of functions
- 4 adjustable feet in height.
- Bubble level.
- Units: kg o g.
- Operating temperature range: -10°C + 40°C.
- Power supply with adaptor AC/DC IP68 100/240V 50/60Hz 12V 1000mA
- Internal battery 6V/4Ah rechargeable.
- Unique range / Multi range / Multi interval.
- Programmable auto switch off (programmable: from 1 to 99 minutes)



# Checkweighing Scale CW100

## Features

- Totalization
- Piece counting
- Tare
- Gross/ Net
- Limit function: with symbol and color signal.

### CHECKWEIGHER:



Set a high / low goal and margin parameters.



PCS



CHECK



BAT INT



AC/DC




INOX



IP67



NO VERIF

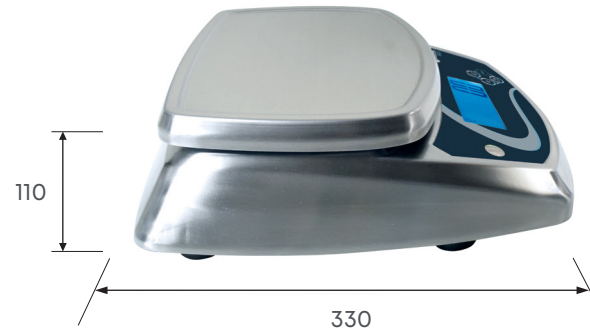

## Technical Specifications

CODE #	Capacity (kg)	Readout (g)	Pan Dimensions (mm)	Packing Dimensions (kg)	Packing Weight (kg)	Certifications (ENAC)
CW100.WW/6	6	1	245 x 190	365 x 340 x 150	4,7	900001
CW100.WW/15	15	2	245 x 190	365 x 340 x 150	4,7	900001

**WEIGHTRON** BILANCIAI  
**BILANCIAI** INDUSTRIAL WEIGHING SPECIALISTS **GROUP**

**Head Office**  
 Titan Works,  
 Bridge Way,  
 Chesterfield Trading  
 Estate,  
 S41 9QJ

0808 196 0906  
[sales@weightroncb.co.uk](mailto:sales@weightroncb.co.uk)  
[www.weightron.com](http://www.weightron.com)

Agent / Dealer